



Modeling & Analysis

Poster: 915
AbsTrak: 18680
Appearance: 906

The Brede database: a small database for functional neuroimaging

Finn Årup Nielsen

Informatics and Mathematical Modelling, Technical University of Denmark



Abstract

The “Brede database” provides data for novel information retrieval techniques and automated meta-analyses in functional neuroimaging.

The complete database is available on the Web in XML and Matlab format. Results from automated analyses are also available on the Web.

Matlab programs are available in the “Brede neuroinformatics toolbox” for analysis and visualization of the data.

Brede neuroinformatics database

Main component: Data from scientific articles reporting Talairach coordinates:

- Cognitive functional neuroimaging experiments (majority)
- Lesion, spatial neglect
- Morphometry, London taxi drivers
- Pathological changes, Alzheimer’s disease


“Poor man’s XML” (pXML, with no attributes and no empty tags): Database kept in a simplified version of XML, distributable on the Internet

Linked to other databases: PubMed, MeSH, SenseLab, fMRIDC.

The database presently consists of data constructed from 85 scientific articles, containing 276 experiments and 1842 locations

Database components

The database is inspired by the hierarchical structure of BrainMap [1] with scientific articles (“bib” structures) on the highest level containing one or more experiments (“exp” structure”, corresponding to a contrast in general linear model analyses), these in turn comprising one or more locations (“loc” structures).

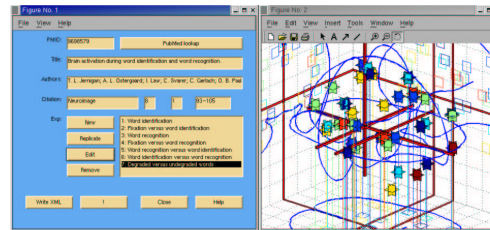


The information on the “bib” level (author, title, ...) is setup automatically from PubMed while the rest of the information is entered manually in a Matlab graphical user interface.

Exp	Author	Title	Modality	Scanner	Behavioral	Modality	Scanner	Behavioral
1	Genovese, C.R.	Nonparametric statistical testing of EEG- and MEG-data	fMRI	1.5T	Working memory	fMRI	1.5T	Working memory
2	Genovese, C.R.	Nonparametric statistical testing of EEG- and MEG-data	fMRI	1.5T	Working memory	fMRI	1.5T	Working memory
3	Genovese, C.R.	Nonparametric statistical testing of EEG- and MEG-data	fMRI	1.5T	Working memory	fMRI	1.5T	Working memory
4	Genovese, C.R.	Nonparametric statistical testing of EEG- and MEG-data	fMRI	1.5T	Working memory	fMRI	1.5T	Working memory
5	Genovese, C.R.	Nonparametric statistical testing of EEG- and MEG-data	fMRI	1.5T	Working memory	fMRI	1.5T	Working memory
6	Genovese, C.R.	Nonparametric statistical testing of EEG- and MEG-data	fMRI	1.5T	Working memory	fMRI	1.5T	Working memory
7	Genovese, C.R.	Nonparametric statistical testing of EEG- and MEG-data	fMRI	1.5T	Working memory	fMRI	1.5T	Working memory
8	Genovese, C.R.	Nonparametric statistical testing of EEG- and MEG-data	fMRI	1.5T	Working memory	fMRI	1.5T	Working memory
9	Genovese, C.R.	Nonparametric statistical testing of EEG- and MEG-data	fMRI	1.5T	Working memory	fMRI	1.5T	Working memory
10	Genovese, C.R.	Nonparametric statistical testing of EEG- and MEG-data	fMRI	1.5T	Working memory	fMRI	1.5T	Working memory

On the “loc” level this includes the 3D stereotactic coordinates in either Talairach or MNI space, the brain area (functional, anatomical or cytoarchitectonic area) and magnitude values such as Z-score and P-value.

Contextual markup

On the “exp” level information such as modality, scanner and behavioral domain are recorded with “external components” (such as “face recognition”, “kinetic boundaries”, “Alzheimer’s disease” or “BZ site GABA-A receptor”) organized in a directed graph.

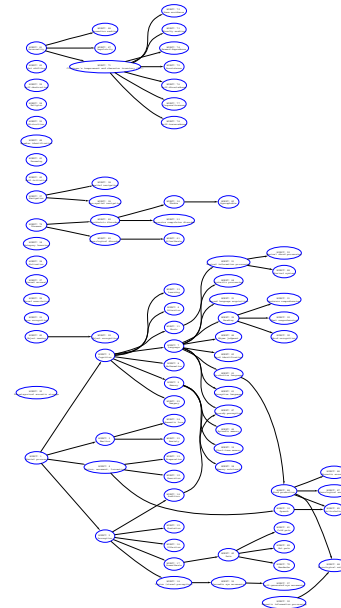

The external components correspond to MeSH terms (NLM Medical Subject headings) and are linked to MeSH where equivalent items exist. There are presently 284 external components.

Voxel-based analysis

Voxelization: The locations for each “exp” and “bib” structure are voxelized to a volume by convolving each location with a Gaussian kernel [8, 11].

The voxelization equation for a specific experiment e from its set of locations $\{\mathbf{x}_l : l \in \mathcal{L}_e\}$ is


$$p(\mathbf{x}|e) = \sum_{l \in \mathcal{L}_e} (2\pi\sigma^2)^{-3/2} \exp\left[-\frac{(\mathbf{x} - \mathbf{x}_l)^2}{2\sigma^2}\right] P(l),$$

where there is a equal weighting over locations $P(l) = 1/|\mathcal{L}_e|$ and the kernel width is fixed at $\sigma = 1\text{cm}$. Alternatively, it can be optimized with leave-one-out cross-validation [8]. The voxelization for a specific “bib” item b is constructed as the average over its “exp”

$$p(\mathbf{x}|b) = \sum_{e \in \mathcal{E}_b} p(\mathbf{x}|e) P(e), \quad (2)$$

with priors taken as uniform over experiments $P(e) = 1/|\mathcal{E}_b|$.

Voxelization can be regarded as the inverse operation of finding the maxima in an image:

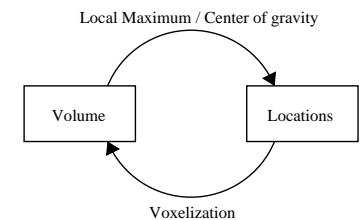


Automated analysis

Static web-pages are generated from the “exp” and “bib” structures with Corner Cube visualization [10] as PNG and VRML files and hyperlinks to PubMed and fMRIDC [12].

The combined set of volumes is converted to matrices and the following analyses are performed automatically:

- **Multivariate analyses** are performed such as singular value decomposition (SVD), independent component analysis (ICA) and non-negative matrix factorization (NMF) [4].

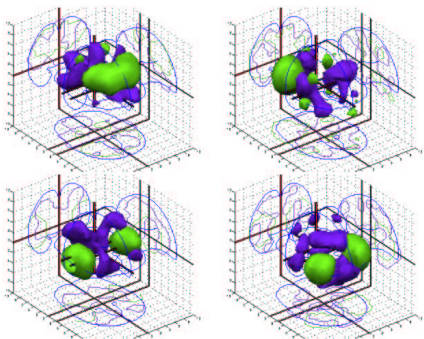

- **Finding related volumes:** Sorted lists with related volumes are found for each individual volume as well as with respect to the SVD eigenimages and the results of the ICA and NMF [9].
- **Asymmetry:** Counting the number of locations in left and right hemisphere and comparing the counts to a binomial distribution gives a laterality index.
- **Novelty:** Comparing each volume to mean or nearest volume gives an estimate of novelty or “outlierness”: How different a volume is from the rest.

Example entry

WOEXP: 196 – London taxi drivers

Pub -> Anatomist | Author | ICA | fMRI | Hemis | Parents | Exp | Trial | WOBIB |
Bio -> Anatomist | Anatomist | ICA | fMRI | Hemis | Parents | Exp | Trial | WOBIB |
Ref -> Anatomist | Anatomist | ICA | fMRI | Hemis | Parents | Exp | Trial | WOBIB |

[WOEXP: 196] **London taxi drivers** Gray matter volume in London taxi drivers with extensive navigation experience versus controls. WOEXP: 196.

E. A. Maguire, D. G. Gadian, I. S. Haxelwood, C. D. Gholak, T. Ashburner, J. B. Frackowiak, C. D. Frith. *Strategic-relevant structural change in the hippocampus of taxi drivers*. *Proc Natl Acad Sci U S A* 98(18):10439–44, 2001. PMID: 11272836. DOI: 10.1073/pnas.180492298 WOBIB: 5.

WOEXT: 27

Mafabry MRI

Asymmetry: 0.0000 (left: -1, right: +1)

VRML: 67.3kb (61 Kb)

x	y	z	Lateral anatomy	Functional area
31	-22	-10	Right hippocampus	
-31	-28	-7	Left hippocampus	

Related – positive correlated volumes

- +2: 0.49185 (126) **Successful navigation versus lost trials**. Successful navigation in a complex virtual zone where the destination was reached versus unsuccessful navigation in a complex virtual zone. WOEXP: 122. E. A. Maguire, B. Knopik, J. E. Borsoi, E. S. Turkeltaub, C. D. Frith, J. O. Gruber. *Learning when and getting there: a brain navigation network*. *Science* 296(5625):91–4, 1999. PMID: 10727166 WOBIB: 3.
- +3: 0.48398 (121) **Buildings visual objects**. Visual object stimuli: Building versus faces. WOEXP: 10. Levy, D. Hasson, G. Avidan, T. Hendler, R. Malach. *Center-periphery organization of human object areas*. *Hum Brain Mapp* 4(5):552–9, 2001. PMID: 11316560 DOI: 10.1002/hbm.1060 WOBIB: 5.
- +4: 0.46273 (244) **Memory retrieval with personal relevance and temporal specificity**. Interaction between memory retrieval of temporal specificity and personal relevance versus nonpersonal and nonpersonal memory retrieval and sets of word learning. WOEXP: 244. E. A. Maguire, C. J. Hasson, D. Gadian, T. Ashburner, R. Malach. *Center-periphery organization of human object areas*. *J Cogn Neurosci* 13(12):1511–1515, 2001. PMID: 11808000 WOBIB: 3.

A web-page constructed from the “exp” entry (WOEXP: 196) of an experiment reported in [6] — a morphometry study of London taxi drivers: Listed with Talairach coordinates in the hippocampus and a Corner Cube visualization where the two locations are shown as glyphs together with an iso-surface as wire-frame in the volume from voxelization.

The first part of the list with related volumes are shown at the bottom.

Other features

Ad hoc search can obtain the closest locations to a user-specified coordinate or the closest experiments to a user-specified set of locations.

Items in the database are identified with unique numbers and the type of identifier is given a unique string, e.g., “WOBIB: 27” for an Epstein and Kanwisher paper, thus allowing Internet search engine to identify the phrase.

Example entry

WOEXT: 25. Face recognition. Processing of face images.

Visual object recognition

Parents | Siblings | Children

Experiments:

1. **Face visual object**. Visual objects: Faces versus buildings. WOEXP: 11. Levy, U, Hasson, G, Avidan, T, Hendler, R, Malach. *Center-periphery organization of human object areas*. *Hum Brain Mapp* 4(5):552–9, 2001. PMID: 11316563 WOBIB: 5.
2. **Photographs of faces versus houses and chairs**. Correlations between picture viewing and delayed match-to-sample of gray-scale photographs versus scrambled pictures and faces versus houses and chairs, with matching choice indicated by pressing a button with the right of left hand. WOEXP: 25. A. Ishai, L. G. Ungerleider, A. Martin, J. V. Haxby. *The representation of objects in the human occipital and temporal cortex*. *J Cogn Neurosci* 12 Suppl 2:24–51, 2000. PMID: 11506616. PMIDCID: 2-2600-11110. WOBIB: 5.
3. **Front-face**. Line drawings of front face versus line drawings of back face. WOEXP: 192. U. Hasson, T. Hendler, D. Ben Bashat, R. Malach. *Vase or face? A neural correlate of shape-selective grouping processes in the human brain*. *J Cogn Neurosci* 13(6):744–53, 2001. PMID: 11664710. PMIDCID: 2-2601-11118. WOBIB: 36.

The “face recognition” external component (WOEXT: 23) with links to experiments marked up as “face recognition”, here presently experiments from [5, 3, 2].

Availability

Database distributed as XML and Matlab files. Most recent update available from <http://hendrix.imm.dtu.dk/services/jerne-/brede/>.

Matlab programs for manipulating, analyzing and visualizing the data are available in the “Brede neuroinformatics toolbox” [7], <http://hendrix.imm.dtu.dk/software/brede/>.

Acknowledgment

Lars Kai Hansen. Finn Årup Nielsen is funded by the European Union project MAPAWAMO,

References

- [1] Fox PT and Lancaster JL. Neuroscience on the net. *Science*, 266:994–996, 1994.
- [2] Hasson U, et al. Vase or face? a neural correlate of shape-selective grouping processes in the human brain. *Journal of Cognitive Neurosci*, 13:744–753, 2001.
- [3] Ishai A, et al. The representation of objects in the human occipital and temporal cortex. *Journal of Cognitive Neuroscience*, 12:35–51, 2000.
- [4] Lee DD and Seung HS. Learning the parts of objects by non-negative matrix factorization. *Nature*, 401:788–791, 1999.
- [5] Levy I, et al. Center-periphery organization of human object areas. *Nature Neuroscience*, 4:533–539, 2001.
- [6] Maguire EA, et al. Navigation-related structural change in the hippocampi of taxi drivers. *Proceedings of the National Academy of Sciences USA*, 97:4398–4403, 2000.
- [7] Nielsen FÅ and Hansen LK. Experiences with Matlab and VRML in functional neuroimaging visualizations. In S Klasky and S Thorpe, editors, *VDE2000 - Visualization Development Environments, Workshop Proceedings, Princeton, New Jersey, USA, April 27–28, 2000*, pages 76–81. Princeton Plasma Physics Laboratory, Princeton, New Jersey, 2000.
- [8] Nielsen FÅ and Hansen LK. Modeling of activation data in the BrainMap™ database: Detection of outliers. *Human Brain Mapping*, 15:146–156, 2002.
- [9] Nielsen FÅ and Hansen LK. Finding related functional neuroimaging volumes. *Artificial Intelligence in Medicine*, 2003. In print.
- [10] Rehm K, et al. A symbolic environment for visualizing activated foci in functional neuroimaging datasets. *Medical Image Analysis*, 2:215–226, 1998.
- [11] Turkeltaub PE, et al. Meta-analysis of the functional neuroanatomy of single-word reading: method and validation. *NeuroImage*, 16:765–780, 2002.
- [12] Van Horn JD, et al. The functional magnetic resonance imaging data center (fMRIDC): the challenges and rewards of large-scale databasing of neuroimaging studies. *Philosophical Transactions of the Royal Society of London, Series B, Biological Sciences*, 356:1323–1339, 2001.